

Please type a plus sign (+) inside this box -



PTO/SB/05 (1/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 0250-776

First Inventor or Application Identifier: Fujio OKADA et al.

Title: IMAGING DEVICE

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages [29]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
3. ☒ Drawing(s) (35 USC 113) Total Sheets [7]
4. ☒ Oath or Declaration Total Pages [4]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
(Note Box 5 below)
  - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.53(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a  
copy of the oath or declaration is supplied under Box 4b,  
is considered to be part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement ☐ Copies of IDS  
(IDS)/PTO-1449 Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ \*Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)
15. ☒ Certified Copy of Japanese Priority Document  
No. 10-277321 Filed: September 30, 1998
16. ☐ Other:

\*A new statement is required to be entitled to pay small entity fees,  
except where one has been filed in a prior application and is being  
relied upon.

17. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requested information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_  
Prior application information: Examiner: \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label Customer No. 22204 or ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name: Donald R. Sludebaker  
Firm: SIXBEY, FRIEDMAN, LEEDOM & FERGUSON, P.C.  
Address: 8180 Greensboro Drive, Suite 800  
City: McLean State: VA Zip Code: 22102  
Country: U.S.A. Telephone (703) 790-9110 FAX (703) 883-0370

Name: Jeffrey L. Costello Registration No. 35,483

Signature *Jeffrey L. Costello* Date: September 30, 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of  
time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR  
COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.



09/30/99

09/30/99

106560-000000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re New PATENT Application of )  
Fujio OKADA et al. )  
Serial No. Not Yet Assigned ) Attn: Applications  
Filed: September 30, 1999 ) Branch  
For: IMAGING DEVICE ) Date: September 30, 1999

PRELIMINARY AMENDMENT

Honorable Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Please preliminarily amend the subject application as follows:

IN THE CLAIMS:

Claim 5, lines 1 and 2, change "any one of claims 1 to 4" to --claim 1 or claim 2.--

REMARKS

This application has been amended to correct the claim dependency

Examination on the merits is requested.

Respectfully submitted,

Jeffrey L. Costellia  
Registration No. 35,483

Sixbey, Friedman, Leedom & Ferguson, P.C.  
8180 Greensboro Drive, Suite 800  
McLean, Virginia 22102  
(703) 790-9110

IMAGING DEVICE

BACKGROUND OF THE INVENTION

Field of the Invention

5           The present invention relates to an imaging device, and more particularly to an imaging device comprising imaging elements, such as CCDs, which is used as a surveillance camera, a medical camera, or the like.

Description of the Related Art

10           Video cameras for capturing images (hereinafter simply called "cameras") comprising imaging means, such as CCD imaging elements, or the like, are known in the prior art. Currently, such cameras are employed not only for broadcast and domestic use, but are also used widely as surveillance cameras, medical cameras, and the like.

15           When a colour image is captured using a camera of this kind, then in order to obtain a colour signal (comprising, for example, three primary colour signals, R, G, B) from a single CCD imaging element, using a single-plate camera, for example,) a method is adopted whereby  
20           colour filters are superposed in pixel units arranged numerously in a two-dimensional shape, and colour information is obtained by multiplexing it with brightness information, the brightness signal and the three primary  
25           colour signal (or a signal conforming to same) being separated from each other. For the colour filters, a

colour filter array comprising 3-4 types of colour (primary colours or complementary colours) arranged in a dot fashion is used.

5 The separated three primary colour signal then undergoes white balance (WB) correction, gamma ( $\gamma$ ) correction for offsetting the  $\gamma$  characteristics of the cathode tube, high-level suppression processing, such as KNEE processing or white clipping (WC), and the like, for each colour signal, whereupon it is supplied along with the brightness signal to an output circuit for carrying out matrix processing and encoding processing, and then converted to an RGB signal of a prescribed level or a video signal conforming to a broadcast standard such as the NTSC system, or the like.

10  
15 Furthermore, currently, outline enhancement processing, image zoom processing (enlargement and reduction processing), and the like, is sometimes implemented before outputting the signal, in order to raise visual resolution.

20 In a conventional imaging device, imaging signals are read out from the CCD imaging elements by carrying out interlace scanning. For example, in an imaging element using an RGB primary colour filter array based on a green check system, as typified by the Bayer system, after  
25 initial exposure, the imaging signal for the odd-numbered field comprising odd-numbered lines, 1, 3, 5, ..., is read

out, and after the subsequent exposure, the imaging signal for the even-numbered field comprising even-numbered lines, 0, 2, 4, ..., is read out. Furthermore, in an imaging element which combines pixels using a complementary colour filter array, known as a frequency interleave system or a colour difference sequential combining and read-out system, after the initial exposure, an imaging signal for the odd-numbered fields comprising a combined signal for even-numbered lines and their subsequent odd-numbered lines, such as 0+1, 2+3, 4+5, ..., is read out, and after the next exposure, an imaging signal for the even-numbered fields comprising a combined signal for the odd-numbered lines and their subsequent even-numbered lines, such as 1+2, 3+4, 5+6, ..., is read out. In other words, a combined signal for two lines of CCD imaging elements is taken as the imaging signal for a single line in each field.

In cases where imaging elements are used in any of the systems described above, an image signal for one frame is created by interlace scanning on the basis of the imaging signal for the odd-numbered field and the imaging signal for the even-numbered field read out as described above, and this image signal is output to a TV monitor, or the like.

Here, the aforementioned outline enhancement processing, or the like, is generally carried out in field units on the basis of an image signal wherein odd-numbered

fields and even-numbered fields are read out successively from the imaging elements.

However, if outline enhancement processing (in particular, in the vertical scanning direction) and image zoom processing are carried out in field units, since the image signal for each field is created from signals for non-consecutive lines 1, 3, 5, ..., etc., it is not possible to use data for adjacent lines in the frame image as line data for use in these processing steps, and consequently, image processing becomes coarse, image distortions occur in detailed areas, and image quality falls. In devices which output only moving images, such deterioration in image quality does not often present a significant problem, but in cameras used in medical equipment, such as endoscopes, or the like, it is necessary to output a stationary image, or "hard copy", and hence image deterioration of this kind becomes a problem.

In order to resolve problems such as image deterioration of this kind, a method may be conceived whereby a sequential scan frame image signal is generated on the basis of an odd-numbered field imaging signal and an even-numbered field imaging signal obtained as described above, and outline enhancement processing or zoom processing is carried out in frame units.

However, in the conventional imaging signal read-out method described above, since the imaging signal for the

odd-numbered field is obtained after the initial exposure and the imaging signal for the even-numbered field is obtained after the subsequent exposure, there is a time lag in exposures between the imaging signals for the two fields which form the image signal for one frame. Therefore, if there is a relative movement between the imaging device and the object being imaged, a problem arises in that a frame image signal having degraded image quality producing blurring and colour deviation will be generated and image quality will be degraded further if outline enhancement processing and image zoom processing are carried out on the basis of this signal.

#### SUMMARY OF THE INVENTION

The present invention was devised in view of the foregoing, an object thereof being to provide an imaging device which does not give rise to deterioration of image quality, as in the prior art, when signal processing, such as outline enhancement processing, image zoom processing, or the like, is carried out.

The imaging device according to the present invention comprises: an imaging element, wherein a plurality of pixels are arranged in a plurality of lines, which is capable of reading out imaging signals captured by means of the pixels, line by line; light exposure controlling means for alternately repeating steps of exposure and non-exposure of the imaging element to light; driving means



for driving the imaging element in such a manner that an imaging signal is output for the pixels in each line of one of either the odd-numbered lines or the even-numbered lines, from the pixels in the plurality of lines, for a prescribed time period after the exposure, whereupon an imaging signal is output for the pixels in each line of the other of either the odd-numbered lines or the even-numbered lines, before the subsequent exposure; first storing means for storing an imaging signal for each of the one group of lines and second storing means for storing an imaging signal for each of the other group of lines (naturally, it is also possible to provide a single storing means comprising both functions); and sequential scanning means for obtaining a sequential scan imaging signal by repeatedly reading out the imaging signal for each line stored in the first storing means and the imaging signal for each line stored in the second storing means, in alternating sequence.

Furthermore, the imaging device according to the present invention comprises: an imaging element for capturing colour images, wherein a plurality of pixels are arranged in a plurality of lines and a plurality of colour filters for pixel binning are positioned in units of the pixels, which is capable of reading out imaging signals captured by means of the pixels, line by line; light exposure controlling means for alternately repeating steps

of exposure and non-exposure of the imaging element to light; driving means for driving the imaging element in such a manner that an imaging signal is output for the pixels in each line of one of either the odd-numbered lines or the even-numbered lines, from the pixels in the plurality of lines, for a prescribed time period after the exposure, whereupon an imaging signal is output for the pixels in each line of the other of either the odd-numbered lines or the even-numbered lines, before the subsequent exposure; first storing means for storing an imaging signal for each of the one set of lines and second storing means for storing an imaging signal for each of the other set of lines (naturally, it is also possible to provide a single storing means comprising both functions); and sequential scanning means for obtaining a sequential scan imaging signal by repeatedly using, in alternating sequence, a pixel-binned signal for a first binning line, wherein the imaging signal for the pixels of each even-numbered line is combined with the imaging signal for the pixels of each subsequent odd-numbered line which correspond to the pixels of the even-numbered line, and a pixel-binned signal for a second binning line, wherein the imaging signal for the pixels of each odd-numbered line is combined with the imaging signal for the pixels of each subsequent even-numbered line which correspond to the pixels of the odd-numbered line.

Desirably, the imaging device according to the present invention further comprises outline enhancement processing means for implementing outline enhancement processing, or enlargement and reduction (zoom) processing means for implementing enlargement and reduction processing of the image, on the basis of the sequential scan imaging signal. Naturally, it is more desirable if the imaging device comprises both of these functions.

Moreover, desirably, the imaging device according to the present invention further comprises scan converting means for generating a sequential scan image signal for a personal computer interface, or the like, or an interlaced scan image signal for a TV system, or the like, on the basis of the sequential scan imaging signal. Naturally, it is more desirable if this processing is based on a sequential scan imaging signal that has undergone outline enhancement processing or enlargement and reduction processing.

According to the imaging device relating to the present invention, a sequential scan imaging signal is obtained using an imaging element capable of reading out an imaging signal line by line, repeating a process of alternately exposing and not exposing the imaging element, whilst reading out imaging signals for odd-numbered lines and even-numbered lines independently and storing these signals temporarily in storage means, and repeatedly

reading out the stored imaging signals for each set of lines, in alternating sequence. This means that by using a sequential scan imaging signal of this kind, it is possible to carry out signal processing in frame units based on exposures of the same time period, in other words, signal processing using adjacent lines in a frame image, in contrast to conventional signal processing in field units, and consequently, finer (more detailed) processing can be carried out than in the prior art. This advantage is particularly notable in outline enhancement processing and image zoom processing.

Moreover, by using an imaging element for colour imaging which comprises a plurality of colour filters for combining pixels arranged in pixel units and is capable of reading out imaging signals line by line, it is also possible to achieve similar advantages in an imaging device for carrying out colour signal processing based on a colour difference sequential combining and read-out system.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a circuit block diagram wherein an imaging device according to an embodiment of the present invention is applied to an electronic endoscope;

Fig. 2 is a compositional diagram of a colour filter for an imaging element used in the aforementioned electronic endoscope;

Fig. 3 is a diagram showing the contents of imaging data created by the circuitry from the imaging element to the third memory in the aforementioned electronic endoscope;

Fig. 4 is a diagram illustrating the principal operations of the aforementioned electronic endoscope;

Fig. 5 is a circuit block diagram of an electronic endoscope using an imaging element having a colour filter of a different composition;

Fig. 6 is a compositional diagram of a colour filter for an imaging element having the aforementioned colour filter of a different composition; and

Fig. 7 is a diagram illustrating the principal operations of the aforementioned electronic endoscope using an imaging element having a colour filter of a different composition.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Below, an embodiment of the present invention is described in detail with reference to the drawings. Fig. 1 shows a circuit block diagram wherein an imaging device according to an embodiment of the present invention is applied to an electronic endoscope.

As shown in Fig. 1, this electronic endoscope 1 comprises a scope end section 10, a scope main unit 11, a processor section 12, and a light source section 13.

A CCD imaging element 15 is provided in the scope end

section 10, along with a light guide 16 which guides illumination light generated by the light source section 13 to the tip of the scope end section 10.

5 The CCD imaging element 15 comprises a plurality of pixels arranged in a plurality of lines, and a plurality of colour filters for combining pixels in the array configuration shown in Fig. 2 is arranged in pixel units. In other words, as shown in Fig. 2, Mg (magenta), G (green), Cy (cyan) and Ye (yellow) are arranged in pixel units, as shown in Fig. 2. This CCD imaging element 15 is based on an interline transfer system, and it is capable of reading out imaging signals captured by the pixels, line by line, by means of a drive pulse control method.

10 A pulse output circuit 18 for outputting drive pulses for driving the imaging element 15, an all-pixel read-out pulse generating circuit 19 and a timing generator 20 are provided in the scope main unit 11. The accumulated data for all pixels gathered by the imaging element 15 in one exposure is divided into odd-numbered lines and even-numbered lines, and a pulse (read-out pulse) for reading out data line by line is generated and input to the pulse output circuit 18. The pulse output circuit 18 implements control whereby the imaging signal for the odd-numbered lines and the imaging signal for the even-numbered lines are read out separately from the imaging element 15 in a sequential fashion, on the basis of the read-out pulses.

The scope main unit 11 also comprises: an A/D converter 22 for inputting imaging signals output by the imaging element 15 and converting these signals to digital image data; a first memory (first storage means) 23 for storing imaging data for odd-numbered lines; a second memory (second storage means) 24 for storing imaging data for even-numbered lines; a mixing circuit 25; a memory control circuit 26; a first digital video processor (DVP) 27 and a third memory 28. Thereby, rather than being output as a two-line combined signal as in the prior art, the imaging signal output from the imaging element 15 is stored temporarily, in a state where it is divided into an imaging signal for the odd-numbered lines and an imaging signal for the even-numbered lines, in memories 23, 24 corresponding respectively to the same. Thereupon, the imaging data for the odd-numbered lines and the imaging data for the even-numbered lines is read out sequentially on the basis of the control implemented by the memory control circuit 26, and the mixing circuit 25 combines the imaging data for the odd-numbered lines and the imaging data for the even-numbered lines in such a manner that the pixels of each mutually correspond. The combined imaging data is subjected to prescribed signal processing by the DVP 27, whereupon it is stored in the third memory 28, and sequential scan imaging data is generated by reading out this data in a prescribed order (explained in detail

hereinafter.) In other words, sequential scanning means 29  
is constituted by the first memory 23, second memory 24,  
mixing circuit 25, memory control circuit 26 and DVP 27.

Fig. 3 shows the contents of imaging data created by the  
5 circuitry from the imaging element 15 up to the third  
memory 28.

As illustrated in Fig. 3(A), the imaging element 15  
comprises horizontal lines from line 1 to line N in  
accordance with the number of scanning lines, and is  
constituted in such a manner that the imaging data for  
these horizontal lines is read out by transferring it to  
transfer lines. The imaging data for the odd-numbered  
lines (lines 1, 3, 5, ...) of this imaging element 15 is  
stored in the first memory 23 illustrated in Fig. 3(B),  
and the imaging data for the even-numbered lines (lines 0,  
2, 4, ...) of this imaging data is stored in the second  
memory 24 illustrated in Fig. 3(C).

The mixing circuit 25 carries out pixel binning of  
the imaging data in the memories 23, 24, in such a manner  
that the pixels in both lines, illustrated in Fig. 3(B)  
and Fig. 3(C), correspond with each other. In other words,  
aggregate data for the even-numbered lines and their  
subsequent odd-numbered lines, such as line 0 + line 1,  
line 2 + line 3, line 4 + line 5, ... is output as odd-  
25 numbered field data (pixel binned data for first combined  
line). Furthermore, pixel binning is carried out for the



same lines as in Fig. 3(B) in a state where the read-out line in Fig. 3(C) has been shifted one line downwards (read out from position C1 indicated on diagram), whereby the aggregate data for the odd-numbered lines and their subsequent even-numbered lines, such as line 1 + line 2, line 3 + line 4, line 5 + line 6, ... is output as even-numbered field data (pixel binned data for second combined line).

The odd-numbered field data and even-numbered field data for which pixel binning has been carried out in this way is then subjected to colour signal processing based on a colour difference combining and read-out system, automatic gain control,  $\gamma$  processing, and the like, in the DVP 27, and it is then stored temporarily in the third memory 28. By repeatedly reading out the field data in the third memory 28 in alternate sequence by switching the combined line number on the basis of the control implemented by the memory control circuit 26, this field data is converted to sequential scan imaging data for a single frame, as illustrated by Fig. 3(F). As the diagram reveals, the frame rate is half the field rate, and if the field cycle is 1/60th second, for example, then the frame cycle will be 1/30th second.

A second digital video processor (DVP) 28 which inputs sequential scan imaging data read out from the third memory 28 is provided in the processor section 12,

which is connected after the scope main unit 11. In a DVP  
28, outline enhancement processing, zoom  
(enlargement/reduction) processing, image position control,  
mirror image processing, and the like, is carried out.  
After this DVP 28, there are connected scan converting  
means 32 and a D/A converter 33 for generating sequential  
scan image data for a personal computer interface, etc.,  
or interlace scan image data for TV systems. Thereby,  
sequential scan imaging data is converted by scan  
converting means 32 to data for a PC or TV, and this data  
is then converted to an analogue image signal by D/A  
converter 33 and output.

Moreover, a light source 35 is provided in the light  
source device 13, which is connected to the light guide 16  
contained in the scope end section 10, and an optical  
chopper 36 and iris 37 forming one mode of exposure  
control means are positioned between the light source 35  
and the input end of the light guide 16. The optical  
chopper 36 has, for example, a structure wherein a  
semicircular plate is caused to rotate, and a drive  
circuit 38 and servo circuit 39 are connected in order to  
rotate this optical chopper 36 through one revolution in  
1/30th second. Therefore, by means of this optical chopper  
36, in the field O/E signal (O : odd field; E : even  
field) having a 1/60th second cycle, the imaging element  
15 can be exposed for 1/60th second only and then put into

a non-exposed state during the subsequent 1/60th second time period.

The iris 37, on the other hand, is connected to a drive circuit 40 and an iris control circuit 41, and by driving the iris 37 by means of this drive circuit and iris control circuit 41 on the basis of a brightness signal obtained from the first digital video processor (not illustrated) (in Fig. 1, it is described as an output from

the memory 27), it is possible to adjust the amount of light to which the imaging element 15 is exposed. Next, the action of the electronic endoscope device 1 having the foregoing composition is described with reference to Fig. 4.

As shown in Fig. 4(A), a timing signal for creating one field in 1/60th second is used as a field O/E signal, similarly to a conventional device. Correspondingly, the optical chopper 36 is caused to rotate at 1/30th second per revolution, whereby light is repeatedly injected into the light guide 16 for time periods of 1/60th second separated by light shielding intervals of 1/60th second, as illustrated by  $P_{n-1}$ ,  $P_n$ ,  $P_{n+1}$  in Fig. 4(B). This light is directed via the light guide 16 to the top of the scope end section 10, and the inside of the object under examination is thereby illuminated.

By means of this illumination, an image of the inside

of the object under examination is captured by the imaging element 15 provided in the scope end section 10, and electrical charge corresponding to the image is accumulated in the imaging element 15. This electrical charge is read out on the basis of control pulses from the pulse output circuit 18, and in cases where an electronic shutter function is used, the timing of charge accumulation or read-out can be changed by means of the control pulses, thereby making it possible to vary the charge accumulation time period and to adjust the amount of exposure light.

Thereupon, in the present example, the accumulated electrical charge for all pixels in the imaging element 15 gathered in one exposure cycle is read out under the control of the all-pixel read-out pulse generating circuit 19. In other words, an imaging signal for the odd-numbered lines of field number  $n-1$  and an imaging signal for the even-numbered lines thereof are read out successively from the imaging element 15, on the basis of the exposure light of light illumination  $P_{n-1}$  in Fig. 4(B), and after both signals have been digitally converted by the A/D converter 22, the imaging signal for the odd-numbered lines is stored in the first memory 23 in accordance with the write signal illustrated by Fig. 4(D) and, similarly, the imaging signal for the even-numbered lines is stored in the second memory 24 in accordance with the write signal

illustrated by Fig. 4(E). Thereafter, the corresponding imaging signals for the odd-numbered and even-numbered lines are read out from the imaging element 15 in the sequence of light illumination  $P_n$ ,  $P_{n+1}$ , and are stored in the corresponding memories 23, 24.

Thereupon, as illustrated in Fig. 4(F), the data in the memories 23, 24 is combined pixel by pixel by the mixing circuit 25, in such a manner that combined pixel field data is successively created. For example, number  $n-2$  odd-numbered field data are obtained by mixing combinations of pixels corresponding respectively to imaging data for even-numbered lines ( $2m$ ) and imaging data for the subsequent odd-numbered lines ( $2m+1$ ) in field number  $n-2$  (binning line  $2m+1$ ), number  $n-2$  even-numbered field data are obtained by mixing combinations of pixels corresponding respectively to imaging data for odd-numbered lines ( $2m+1$ ) and imaging data for the subsequent even-numbered lines ( $2m+2$ ) in field number  $n-2$  (binning line  $2m+2$ ), number  $n-1$  odd-numbered field data are obtained by mixing combinations of pixels corresponding respectively to imaging data for even-numbered lines ( $2m$ ) and imaging data for the subsequent odd-numbered lines ( $2m+1$ ) in field number  $n-1$  (binning line  $2m+1$ ), and so on. The odd-numbered field data and even-numbered field data which has undergone pixel binning in this manner then undergoes prescribed signal processing, such as colour

signal processing, or the like, by means of the DVP 27,  
whereupon it is stored temporarily in the third memory 28.

Thereupon, both sets of field data stored in the  
third memory 28 are read out repeatedly in alternate  
fashion by successively changing the binning line, 1, 2, 3,  
..., for the same number field data, for example, number n-2  
field data, thereby creating sequential scan imaging data  
for frame number n-2 (corresponding to the imaging data  
shown in Fig. 3(F)). Sequential scan imaging data for  
successive frames is created similarly by progressively  
changing the field data used, from number n-1, ... .

In the foregoing description, odd-numbered field data  
and even-numbered field data which had undergone pixel  
binning was stored temporarily in the third memory 28,  
data being read out from the third memory 28 in such a  
manner that sequential scan imaging data was obtained, but  
besides this, rather than forming separate field data  
which have undergone pixel binning, it is also possible,  
for example, to form sequential scan imaging data directly  
by carrying out pixel binning and sequential scan  
processing in parallel, from binning line  $2m+1$ ,  $2m+2$ , ...,  
whereupon colour signal processing, and the like, is  
applied to the sequential scan imaging data.

The sequential scan imaging data created in this way  
is input to the DVP 28. In the DVP 28, treatments such as  
outline enhancement, zoom (enlargement/reduction)

processing, image position control, mirror image processing, and the like, are carried out. In other words, these treatments are carried out by using data for the adjacent line or the next to adjacent line in the sequential scan. Therefore, in contrast to conventional devices where data for adjacent lines cannot be used and hence coarse image processing is obtained, when an image is viewed as a frame image, according to the present invention, the aforementioned treatments are carried out by using data for adjacent lines in the frame image, and consequently there is no generation of image distortion even in detailed areas and problems of deterioration in image quality are resolved. The actual treatment methods for outline enhancement processing, zoom processing, and the like, are similar to those used in a conventional device, the only difference being whether the adjacent line data used in the treatments is adjacent line data for a field image, or adjacent line data for a frame image, and since these treatments involve commonly known techniques, they are not described in detail here.

The sequential scan imaging data having undergone outline enhancement processing, and the like, in the DVP 28 is input to the scan converting means 32. The scan converting means 32 creates image data for sequential scanning (progressive or non-interlaced scanning) for personal computer interfaces, and the like, or image data

for interlaced scanning for TV systems, and the like. In specific terms, the foregoing example involves sequential scan imaging data having a frame rate of 1/30th second, and this is either converted to sequential scan image data having a frame rate of 1/60th second, or it is converted to interlaced scan image data having a field rate of 1/60th second and a frame rate of 1/30th second. The method for converting sequential scan imaging data into sequential scan image data having a different frame rate and the method for converting sequential scan imaging data into interlaced scan image data both involve commonly known techniques, and since these commonly known techniques can be used in the present invention, they are not described in detail here.

The foregoing description related to a method where pixel binning is applied, but the present invention is not necessarily limited to this. Namely, provided that an imaging element is used which comprises a plurality of pixels arranged in a plurality of lines and is capable of reading out an imaging signal captured by means of the pixels for each line, then the invention can be applied to any kind of device. For example, it is possible to use a black and white imaging element, or an imaging element using a green-check RGB primary colour filter array, as typified by the aforementioned Bayer system. The mode is described below.



Fig. 5 is a block diagram of an electronic endoscope device 2 using an imaging element wherein a Bayer-type primary colour filter array is positioned.

As shown in Fig. 5, the electronic endoscope device 2 comprises a scope end section 50, a scope main unit 51, a processor section 12 and a light source section 13. The scope end section 50 and the scope main unit 51 are different to those in the electronic endoscope device 1 described above.

A CCD imaging element 55 comprising a Bayer-type primary colour filter array is provided in the scope end section 50. The CCD imaging element 55 contains a plurality of pixels arranged in a plurality of lines, and a plurality of colour filters having the arrangement configuration illustrated in Fig. 6, which are arrayed in pixel units. In other words, R (red), G (green) and B (blue) are positioned in pixel units, as illustrated in Fig. 6, and the imaging element is able to read out imaging signals captured by means of the pixels in accordance with a control system of drive pulses, line by line.

The scope main unit 51 is different to the scope main unit 11 in the aforementioned device 1 in that it does not comprise a mixing circuit and it is provided with DVP 67 in place of DVP 27. In the present example, the imaging signal output from the imaging element 55 is stored

temporarily, in a state where it is divided into an imaging signal for the odd-numbered lines and an imaging signal for the even-numbered lines, in memories 23, 24 corresponding respectively to the same. The imaging data for the odd-numbered lines and the imaging data for the even-numbered lines are then read out successively on the basis of the control implemented by the memory control circuit 26, and the imaging data thus read out is subjected to prescribed signal processing by DVP 67 and then stored in the third memory 28, whereupon it is read out in a prescribed sequence, thereby generating sequential scan imaging data (details described hereinafter). In other words, in the present example, sequential scanning means 69 is constituted by the first memory 23, second memory 24, memory control circuit 26 and DVP 66.

Fig. 7 shows the contents of image data created by the circuitry from the imaging element 55 up to the third memory 28 in the present example.

As shown in Fig. 7(A), horizontal lines are provided in the imaging element 55 from line 1 to line M in accordance with the number of scanning lines, and the element is constituted in such a manner that the imaging data for these horizontal lines is read out by being transferred to transfer lines. The imaging data for the odd-numbered lines (lines 1, 3, 5, ...) of the imaging

element 55 is stored in the first memory 23 shown in Fig. 7(B) as odd-numbered field data, and the imaging data for the even-numbered lines (lines 2, 4, 6, ...) is stored in the second memory 24 shown in Fig. 7(C) as even-numbered field data.

The odd-numbered field data and even-numbered field data stored in the memories 23, 24 undergoes Bayer-system colour signal processing, automatic gain control,  $\gamma$  processing, and the like, and is then stored in the third memory 28. The groups of field data in the third memory 28 are repeatedly read out in alternate sequence on the basis of control implemented by the memory control circuit 26, thereby converting the field data to sequential scan imaging data for a single frame, as illustrated in Fig. 7(D).

Therefore, in the present example, similarly to device 1 described above, since sequential scan imaging data is created, no problems of deterioration in image quality arise when outline enhancement processing, zoom processing, and the like, is carried out on the basis of this sequential scan imaging data. Moreover, it is of course also possible to create sequential scan image data for personal computer interfaces, and the like, and interlaced scan image data for TV systems.

The foregoing descriptions related to cases where the imaging device according to the present invention was

applied to an electronic endoscope, but the invention is not limited to this, and may of course be applied to imaging devices of any kind. Moreover, the invention is not limited to devices capturing moving images, but may also be applied to devices capturing stationary images, for example, digital cameras, which have become remarkably widespread at the present time, or the like.

What is claimed is:

1. An imaging device comprising:

an imaging element, wherein a plurality of pixels are arranged in a plurality of lines, which is capable of reading out imaging signals captured by means of said pixels, line by line;

light exposure controlling means for alternately repeating steps of exposure and non-exposure of said imaging element to light;

driving means for driving said imaging element in such a manner that an imaging signal is output for the pixels in each line of one of either the odd-numbered lines or the even-numbered lines, from the pixels in said plurality of lines, for a prescribed time period after said exposure, whereupon an imaging signal is output for the pixels in each line of the other of either the odd-numbered lines or the even-numbered lines, before the subsequent exposure;

first storing means for storing an imaging signal for each of said one group of lines;

second storing means for storing an imaging signal for each of said other group of lines; and

sequential scanning means for obtaining a sequential scan imaging signal by repeatedly reading out the imaging signal for each line stored in said first storing means and the imaging signal for each line stored

in said second storing means, in alternating sequence.

2. An imaging device comprising:

an imaging element for capturing colour images,  
wherein a plurality of pixels are arranged in a plurality  
of lines and a plurality of colour filters for pixel  
binning are positioned in units of said pixels, which is  
capable of reading out imaging signals captured by means  
of said pixels, line by line;

light exposure controlling means for alternately  
repeating steps of exposure and non-exposure of said  
imaging element to light;

driving means for driving said imaging element  
in such a manner that an imaging signal is output for the  
pixels in each line of one of either the odd-numbered  
lines or the even-numbered lines, from the pixels in said  
plurality of lines, for a prescribed time period after  
said exposure, whereupon an imaging signal is output for  
the pixels in each line of the other of either the odd-  
numbered lines or the even-numbered lines, before the  
subsequent exposure;

first storing means for storing an imaging  
signal for each of said one set of lines;

second storing means for storing an imaging  
signal for each of said other set of lines; and

sequential scanning means for obtaining a  
sequential scan imaging signal by repeatedly using, in

alternating sequence, a pixel-binned signal for a first binning line, wherein the imaging signal for the pixels of each even-numbered line is combined with the imaging signal for the pixels of each subsequent odd-numbered line which correspond to the pixels of said even-numbered line, and a pixel-binned signal for a second binning line, wherein the imaging signal for the pixels of each odd-numbered line is combined with the imaging signal for the pixels of each subsequent even-numbered line which correspond to the pixels of said odd-numbered line.

3. The imaging device according to claim 1 or claim 2, further comprising outline enhancement processing means for implementing outline enhancement processing on the basis of said sequential scan imaging signal.

4. The imaging device according to claim 1 or claim 2, further comprising enlargement and reduction processing means for implementing enlargement and reduction processing of the image on the basis of said sequential scan imaging signal.

5. The imaging device according to any one of claims 1 to 4, further comprising scan converting means for generating a sequential scan image signal for a personal computer interface, or the like, or an interlaced scan image signal for a TV system, or the like, on the basis of said sequential scan imaging signal.

## ABSTRACT OF THE DISCLOSURE

In an electronic endoscope using an imaging element comprising a colour filter for pixel binning, it is possible to carry out outline enhancement processing, zoom processing, and the like, to a high degree of detail. An optical chopper 36 in the form of a semi-circular plate is caused to rotate at 1/30th second per revolution, and images are captured in time periods of 1/60th second separated by light shielding intervals of 1/60th second. An imaging signal for the odd-numbered lines and the even-numbered lines is read out successively from the imaging element at 1/60th second intervals, and stored in memories 23 and 24, respectively. By means of mixing circuit 25, odd-numbered field data is obtained by mixing imaging data for the even-numbered lines and their subsequent odd-numbered lines, and even-numbered field data is obtained by mixing imaging data for the odd-numbered lines and their subsequent even-numbered lines, whereupon the field data undergoes colour signal processing, and the like, in the DVP 27, and is then stored temporarily in the third memory 28. This data is converted to sequential scan imaging data by reading out the data repeatedly in alternate sequence whilst switching the number of the binning line. DVP 31 implements outline enhancement processing, zoom processing, and the like, using this sequential scan imaging data.




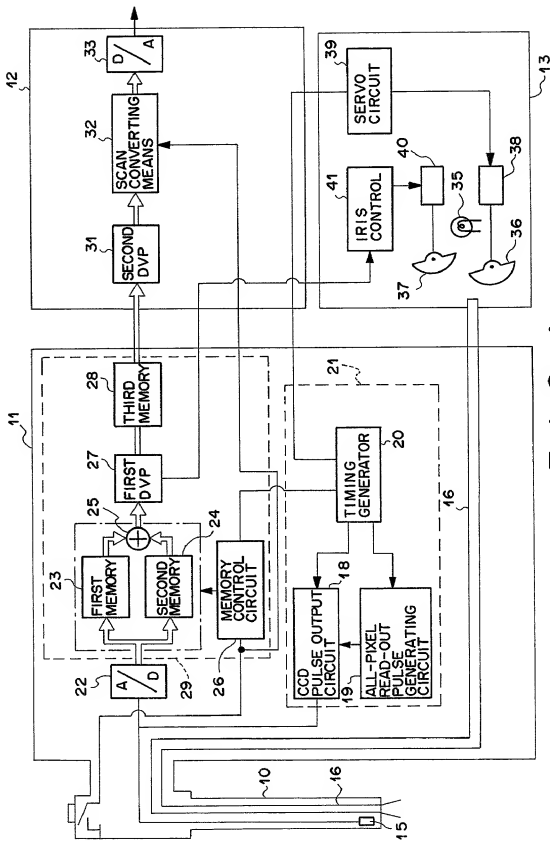


FIG. 1

Mg	G	----	LINE 0
Cy	Ye	----	LINE 1
G	Mg	----	LINE 2
Cy	Ye	----	LINE 3
⋮	⋮		

**F I G . 2**

# FIG. 3

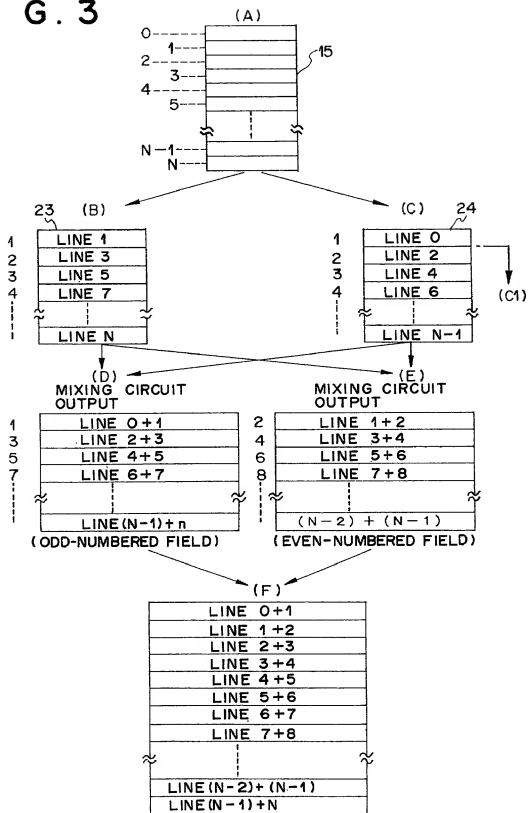

SEQUENTIAL SCAN IMAGING DATA

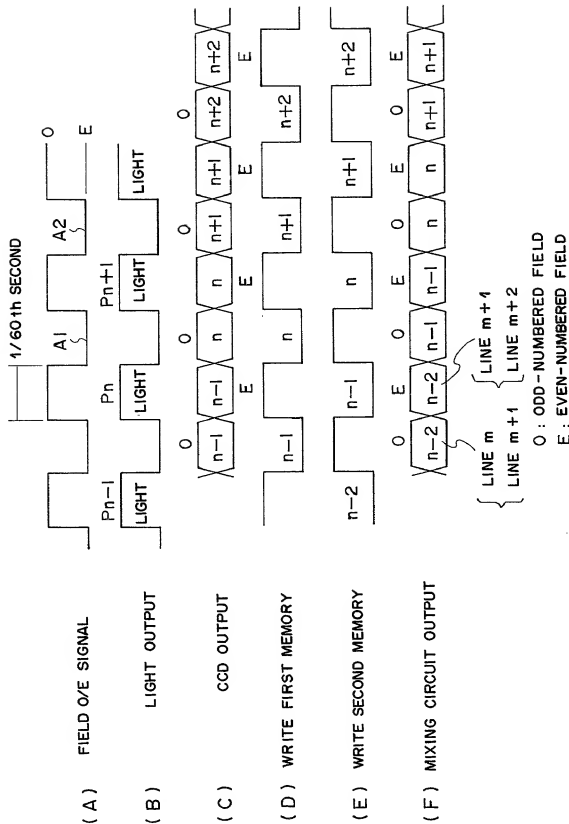


FIG. 4


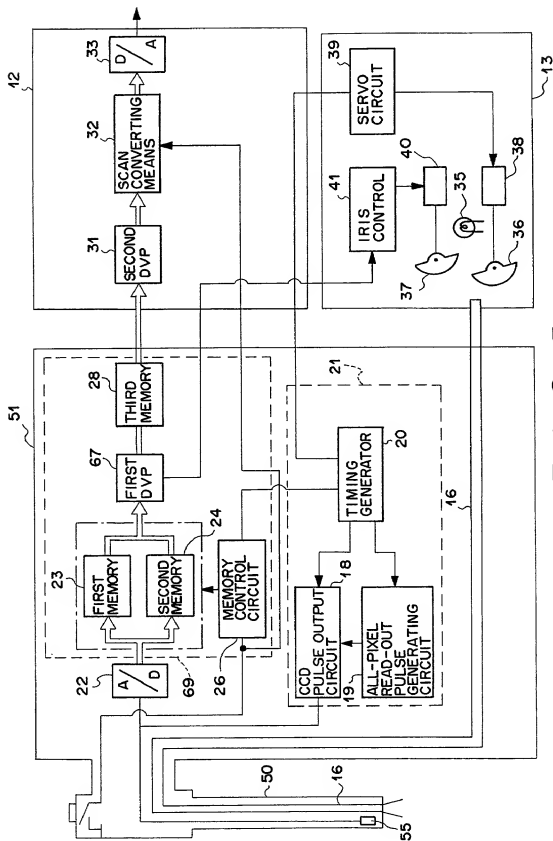


FIG. 5

R	G	R	G	----	LINE 1
R	G	R	G	----	LINE 2
G	B	G	B	----	LINE 3
G	B	G	B	----	LINE 4
R	G	R	G	----	LINE 5
R	G	R	G	----	LINE 6

**F I G . 6**

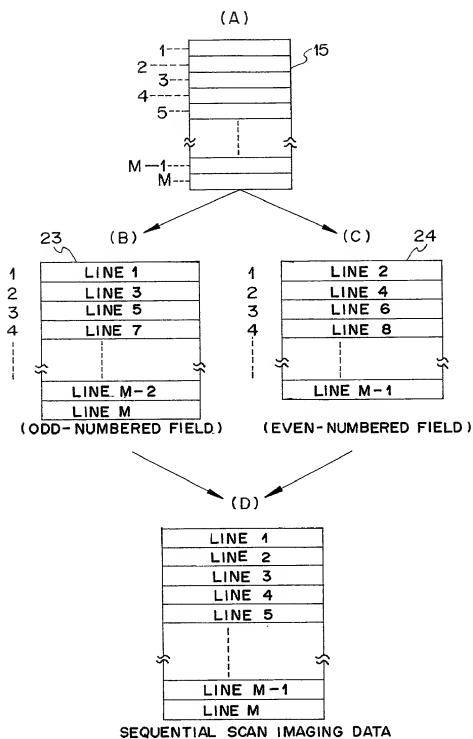

F I G . 7

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

1) Fujio Okada, 2) Mitsuhsa Nakagawa and  
3) Keiichi Negishi

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name. 1) c/o Fuji Photo Optical Co., Ltd., 1-324 Uetake-machi, Ohmiya-shi, Saitama-ken, Japan 2) 3-14-401 Edahigashi, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, Japan 3) 301 States\*

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者(下記の氏名が一つの場合)もしくは最初かつ共同発明者であると(下記の名称が複数の場合)信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

\*Nakamachidai, 1-33-16  
Nakamachidai, Tsuzuki-ku,  
Yokohama-shi, Kanagawa-ken,  
Japan

"IMAGING DEVICE"

上記発明の明細書(下記の欄で×印がついていない場合は、本書に添付)は、

The specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第 37 編第 1 条 56 項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.



# Japanese Language Declaration

(日本語宣言書)

私は、米国法典第 35 編 119 条(a)-(d)項又は 365 条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約 365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

## Prior Foreign Application(s)

外国での先行出願

## Priority Not Claimed

優先権主張なし

(patent) 277321/1998

(Number)  
(番号)

Japan

(Country)  
(国名)

30/09/1998

(Day/Month/Year Filed)  
(出願年月日)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

私は、第 35 編米国法典 119 条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第 35 編 120 条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約 365 条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典代 35 編 112 条第 1 項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第 37 編 1 条 36 項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、継続中、放棄済)

# Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁護士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

Daniel W. Sixbey, (Reg. No. 20,932)  
Charles M. Leedom, Jr. (Reg. No. 26,477)  
David S. Safran (Reg. No. 27,997)  
Donald R. Studebaker (Reg. No. 32,815)  
Tim L. Brackett (Reg. No. 36,092)  
Frank P. Presta (Reg. No. 19,828)  
Robert M. Schulman (Reg. No. 31,196)  
Lawrence D. Eisen (Reg. No. 41,009)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Stuart J. Friedman (Reg. No. 24,312)  
Gerald J. Ferguson, Jr. (Reg. No. 23,016)  
Thomas W. Cole (Reg. No. 28,290)  
Jeffrey L. Costellia (Reg. No. 35,483)  
Eric J. Robinson (Reg. No. 38,285)  
Joseph S. Presta (Reg. No. 35,329)  
Thomas M. Blasey (Reg. No. 33,475)  
Daniel S. Song (Reg. No. 43,143)

ここに署名する者は、この申請に関して米国特許商標局においてなされるべき如何なる行動に関しても、ここに指名された米国弁護士または代理人が、米国弁護士または代理人とここに署名した者との間で直接の連絡を取ることにし、からの指示を受け入れてそれに従う権限を与える。指示を出す人物に変更がある場合は、ここに指名された米国弁護士または代理人は、ここに署名した者からその旨通知を受ける。

The undersigned hereby authorizes any U. S. attorney or agent named herein to accept and follow instructions from \_\_\_\_\_ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U. S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U. S. attorneys or agents named herein will be so notified by the undersigned.

書類送付先

Send Correspondence to:

Sixbey, Friedman, Leedom & Ferguson  
8180 Greensboro Dr., Suite 800  
McLean, VA 22102

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

唯一または第一発明者名	Full name of sole or first inventor		
	Fujio Okada		
発明者の署名	日付	Inventor's signature	Date
		Fujio Okada	September 24, 1999
住所	Residence		
	Saitama-ken, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o Fuji Photo Optical Co., Ltd., 1-324 Uetake-machi, Ohmiya-shi, Saitama-ken, Japan		

第二共同発明者名	Full name of second joint inventor, if any Mitsuhisa Nakagawa		
第二共同発明者の署名	日付	Second inventor's signature	Date
		<i>Mitsuhisa Nakagawa</i>	September 24, 1999
住所	Residence Kanagawa-ken, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address 3-14-401 Edahigashi, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, Japan		

第三共同発明者名	Full name of third joint inventor, if any Keiichi Negishi		
第三共同発明者の署名	日付	Third inventor's signature	Date
		<i>Keiichi Negishi</i>	September 24, 1999
住所	Residence Kanagawa-ken, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address 301 States Nakamachidai, 1-33-16 Nakamachidai, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, Japan		

第四共同発明者名	Full name of fourth joint inventor, if any		
第四共同発明者の署名	日付	Fourth inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		